

Replica cleat base assembly for Laser® dinghy

Part # 98078

Equipment comprises:


Cleat base with two fixing holes

70 100 K Cam mini cleats x 2


70 105 K Cam pillar fairleads x 2

Fitting Instructions:

For very old lasers, you can use the original fixing holes for the alloy clamcleat. If not fitted, position cleat base behind mast along the centreline, measure 437mm back from the mast slot and drill a 4mm pilot hole to accept a 5mm self tapping screw (not supplied). Loosely fit the screw then align again along the centreline; mark then drill the second fixing hole. Remove the cleat base and seal the screw holes with sealant before final fitting.

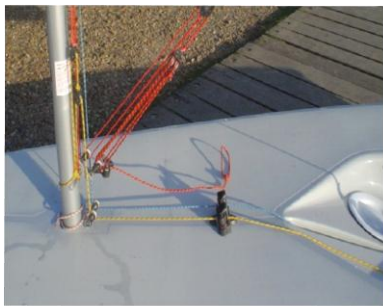

Distance to 1st fixing hole centre from back of mast slot - 437mm

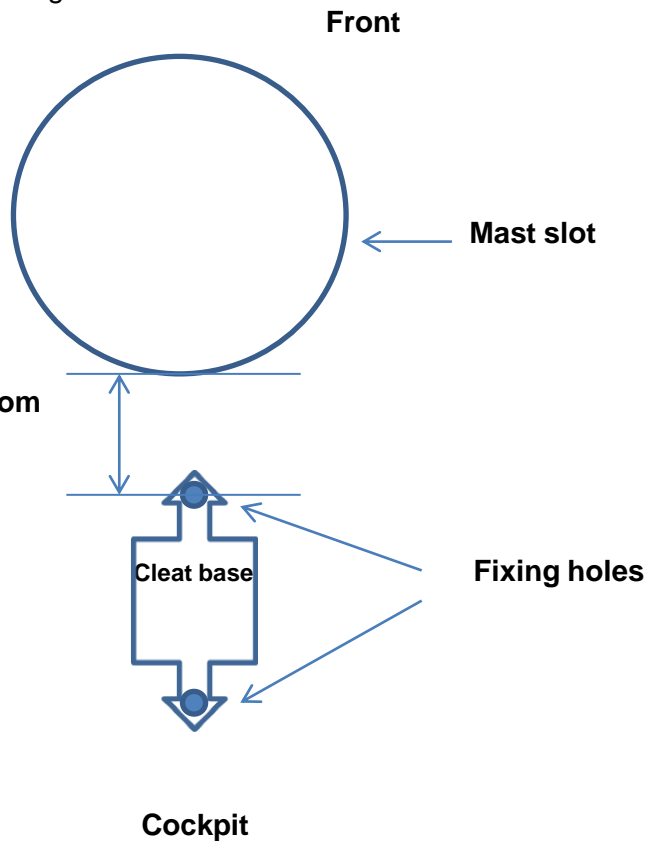

Barton fittings are high quality replacements that perform the same function as the original part. They should not be confused with official parts bearing the Laser® registered trademark. They cannot be used if you are sailing at an Association event. However, they are perfect for social sailing, sailing schools, club sailing or training. Laser® is a registered trademark owned by Velum Limited and currently licensed for use in Europe to Laser Performance (Europe) Limited. Barton Marine Equipment Limited is fully independent of both Laser Performance (Europe) Limited and Velum Limited.